




TWENTY 7



TWENTY 7

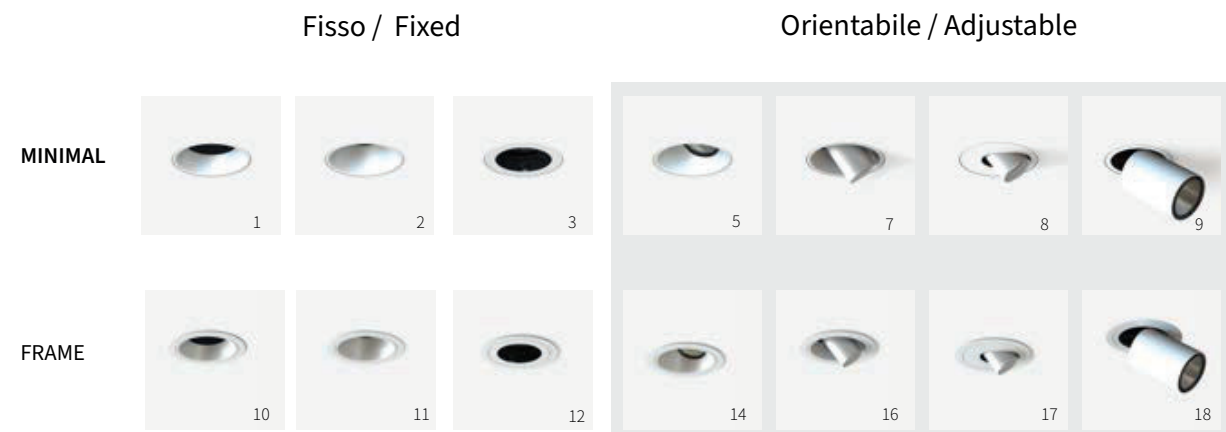

Famiglia di apparecchi da incasso e proiettori da incasso a soffitto per sorgenti LED Chip On Board integrate. Studiato per ottenere, mediante la semplice aggiunta di accessori al corpo lampada, 14 diverse soluzioni illuminotecniche, come varianti delle seguenti emissioni base: diffusa, spot, bassa luminanza e asimmetrica. Disponibili sia in versione rotonda per incasso trimless oppure rotonda con cornice. Disponibilità di molteplici varianti, basculanti con meccanismo roto-traslante oppure con corpo estraibile. Corpo lampada e gruppo ottico in alluminio verniciato, riflettore metallizzato in alluminio 99,99%. Cover coniche in alluminio, per emissioni a bassa luminanza, diffuse o asimmetriche, provviste di sistema di fissaggio e sgancio dal gruppo ottico, mediante calamite, Click and Play. Filtri ottici, satinati, Fresnel e microprismatici (UGR<19) in policarbonato. Griglia a nido d'ape antiabbagliamento in alluminio verniciato. Cover di chiusura inferiori in alluminio verniciato, con foro ellittico, quadrato e tondo, per nascondere l'emissione luminosa. Grado di protezione IP23 / IP43.

Family of recessed luminaires and recessed ceiling projectors for integrated Chip On Board LED sources. Designed to obtain, by simply adding accessories to the lamp body, 14 different lighting solutions, as variants of the following basic emissions: diffuse, spot, low luminance and asymmetric. Available both in round trimless recessed version, or round and square framed. Multiple variants available, tilting with roto-translating mechanism or with extractable body. Body and optical group in painted aluminum, metallized reflector in 99.99% aluminum. Conical aluminum covers, for low luminance emissions, diffused or asymmetrical, equipped with fixing and release system from the optical unit, using magnets, Click and Play. Optical filters, satinized, Fresnel and microprismatic (UGR<19) in polycarbonate. Anti-glare honeycomb grid in painted aluminum. Closing covers in painted aluminum, with elliptical, square and round hole, to hide the light emission. IP23 / IP43.

FINITURE / FINISHINGS



01-BIANCO / WHITE



02-NERO / BLACK

FINITURE PREMIUM / PREMIUM FINISHINGS



81-ORO ROSA / PINK GOLD



82- BRONZO ANTICATO/ ANTIQUE BRONZE



83 - OTTONE BRUNITO SPAZZOLATO/BRUSHED BURNISHED BRASS



1




2



81



82



83



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSTMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL




GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



FISSO / FIXED



ORIENTABILE / ADJUSTABLE



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.




Possibilità di montare lampade adatte alla crescita delle piante indoor / Horticulture version suitable for growth indoor . L'illuminazione adatta al verde converte l'energia elettrica in fotoni che stimolano la fotosintesi delle piante anche in assenza di luce naturale.

EASY RE-FITTING

Twenty7 è provvisto di sistema Click&Play di fissaggio e sgancio delle cover al gruppo ottico mediante calamite.

Twenty7 is provided with Click&Play magnetic lock-unlock system of the cover to optical group.

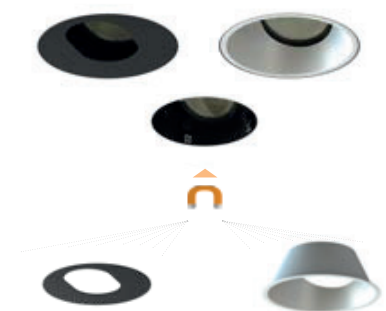

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K
HC		HORTICULTURE
TW		TUNABLE WHITE*




FASCIO / BEAM

S		SPOT
F		FLOOD
W		WIDE



* Tunable White 2700 - 5000°K
La tecnologia Tunable White consente di controllare la temperatura di colore delle sorgenti luminose permettendo di scegliere quella più adatta tra luce bianca calda e fredda. / Tunable White technology allows you to control the color temperature of light sources allowing you to choose the most suitable between warm and cold white light.

CURVE FOTOMETRICHE / PHOTOMETRIC DATA




TWENTY COVER CONICA



TWENTY FOCUS 55




TWENTY FOCUS 90




TWENTY7 MINIMAL

TELAIO OBBLIGATORIO MANDATORY RING



Dim.	H	Kg	CODE
Ø132	55	0,17	TW001


1 FISSO MINIMAL-COVER CONICA BASSA
MINIMAL FIXED- LOW CONICAL COVER



LED	W	mA	Ø	H	Im product/beam 3000K	CODE
17	500	131	130	1415		TW100.9 ● ● / ##
24,3	700	131	130	1854		
LED	W	mA	Ø	H	Im product/beam 3000K	CODE
32	900	131	160	3645		TW101.9 ● ● / ##
900						

● disponibile solo fascio W available only W beam
Accessori : TW001: telaio minimal OBBLIGATORIO - Accessories minimal ring mandatory
L105#: lente Ø 105 - lens Ø 105


2 FISSO MINIMAL-COVER CONICA ALTA
MINIMAL FIXED-HIGH CONICAL COVER



LED	W	mA	Ø	H	Im product/beam 3000K	CODE
17	500	131	130	1930	1827 1905	TW102.9 ● ● / ##
24,3	700	131	130	2468	2356 2430	
LED	W	mA	Ø	H	S15° F24° W38°	CODE
32	900	131	160	3006	2885 2955	TW103.9 ● ● / ##
900						

Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY
L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


3 FISSO MINIMAL-COVER PIANA TONDA
MINIMAL FIXED-ROUND FLAT COVER



LED	W	mA	Ø	H	Im product/beam 3000K	CODE
17	500	131	130	1080	1185	TW104.9 ● ● / ##
24,3	700	131	130	1404	1452	
LED	W	mA	Ø	H	Im product/beam 3000K	CODE
32	900	131	160	2113	2326	TW105.9 ● ● / ##
900						

Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY
L105#: lente Ø 105 - lens Ø 105 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


5 ORIENTABILE MINIMAL-COVER CONICA ELLITTICA
5 MINIMAL ADJUSTABLE-CONICAL-ELLIPTICAL COVER



LED	W	mA	Ømm	H	Im product/beam 3000K	CODE
17	500	131	130	1080	1212 1697	TW112.9 ● ● / ##
24,3	700	131	130	1404	1626 2233	
LED	W	mA	Ømm	H	Im product/beam 3000K	CODE
32	900	131	160	3620	2326 3645	TW113.9 ● ● / ##
900						

● Disponibile anche HC Horticulture Available HC Horticulture version
Accessori - accessories: TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY
L85#: lente Ø 85 - lens Ø 85. Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


7 ORIENTABILE MINIMAL-COVER CONICA + FOCUS 55
7 MINIMAL ADJUSTABLE-FOCUS 55 CONICAL COVER



LED	W	mA	Ømm	H	Im product/beam 3000K	CODE
12	350	131	100	1285	1285 1289	TW115.9 ● ● / ##
18	500	131	100	1575	1575 1579	

Accessori - accessories:
TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY - L55#: lente Ø 55 - lens Ø 55
Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The de-
vices with Tunable white color temperature have to be supplied with 2 channel driver.


8 ORIENTABILE MINIMAL-COVER PIANA ELLITTICA+ FOCUS 55
8 MINIMAL ADJUSTABLE-FOCUS 55 FLAT-ELLIPTICAL COVER



LED	W	mA	Ømm	H	Im product/beam 3000K	CODE
12	350	131	100	1285	1285 1289	TW114.9 ● ● / ##
18	500	131	100	1575	1575 1579	

Accessori - accessories:
TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY - L55#: lente Ø 55 - lens Ø 55.
Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The de-
vices with Tunable white color temperature have to be supplied with 2 channel driver.

9 ORIENTABILE MINIMAL-FOCUS 90
MINIMAL ADJUSTABLE-FOCUS 90



LED	W	mA	Ømm	H	Im product/beam 3000K	CODE
17	500	131	130	1930	1827 1905	TW116.9 ● ● / ##
24,3	700	131	130	2468	2356 2430	
LED	W	mA	Ømm	H	Im product/beam 3000K	CODE
32	900	131	130	3006	2885 2955	TW117.9 ● ● / ##
900						

● Disponibile anche HC Horticulture Available HC Horticulture version

Accessori - accessories:
TW001: telaio minimal OBBLIGATORIO - minimal ring COMPULSORY - L85#: lente Ø 85 - lens Ø 85. Gli appar-
ecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with
Tunable white color temperature have to be supplied with 2 channel driver.

ACCESSORI / ACCESSORIES

LENTI 55 / LENSES 55	LENTI 85 / LENSES NYX 85	LENTI 115 / LENSES NYX 115
Ø Kg CODE	Ø Kg CODE	Ø Kg CODE
LENTE SATINATA / SATINED LENS	85 0,01 L085S.A / ##	115 0,01 L0115S.A / ##
LENTE ELISSOIDALE / ELIPSOID LENS	85 0,01 L085E.A / ##	115 0,01 L0115E.A / ##
LENTE ASIMMETRICA / ASYMMETRIC LENS	85 0,01 L085A.A / ##	115 0,01 L0115A.A / ##
FILTRO NIDO D'APE / HONEY COMB LOUVER	85 0,01 L085R.A / ##	115 0,01 L0115R.A / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

KELVIN	KELVIN
27 2700K	27 2700K
30 3000K	30 3000K
35 3500K	35 3500K
40 4000K	40 4000K
HC Horticulture	
TW Tunable White Dali	
● FASCIO / BEAM	
S Spot	
F Flood	
W Wide	

Per i gradi vedere in tabella - For degrees check the table

/ ## FINITURA | FINISHING

/ 01 bianco white
/ 02 nero black
/ 49 bronzo bronze
/ ## FINITURA PREMIUM PREMIUM FINISHING
/ 81 oro rosa rose gold
/ 82 bronzo antico antique bronze
/ 83 ottone brunito spazzolato brushed burnished brass

COMPOSIZIONE CODICE: xxx.x ● ● / ##


HOW TO CREATE THE CODE: **F1000.827S / 01**

CODE	base code	kelvin	beam	finishing
F1000.8				

DRIVERS VEDI | SEE P.452

TWENTY7 ROUND FRAME


10 TONDA FISSO-COVER CONICA BASSA
ROUND FIXED-LOW CONICAL COVER



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
17	500	131	130	1415	W41°	TW210.9 ● W / ##
24,3	700	131	130	1854		
LED	W	mA	ømm	H	Im product/beam3000K	CODE
32	900	131	160	3645	W41°	TW211.9 ● W / ##

● disponibile solo fascio **W** available only **W** beam
Accessori - accessories: L105#: lente Ø 105 - lens Ø 105


11 TONDA FISSO-COVER CONICA ALTA
ROUND FIXED-HIGH CONICAL COVER



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
17	500	131	130	1930	S15° F24° W38°	TW212.9 ● ● / ##
24,3	700	131	130	2468	2356 2430	
LED	W	mA	ømm	H	Im product/beam3000K	CODE
32	900	131	160	3006	S15° F24° W38°	TW213.9 ● ● / ##
					2885 2955	

Accessori - accessories: L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


12 TONDA FISSO-COVER PIANA TONDA
ROUND FIXED-ROUND FLAT COVER



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
17	500	131	130	1080	S15° F21°	TW214.9 ● ● / ##
24,3	700	131	130	1404	1452	
LED	W	mA	ømm	H	Im product/beam3000K	CODE
32	900	131	160	2113	S15° F21°	TW215.9 ● ● / ##
					2326	

● disponibile solo fascio **S e F** available only **S** and **F** beam


14 TONDA ORIENTABILE-COVER CONICA ELLITTICA
14 ROUND ADJUSTABLE-CONICAL-ELLIPTICAL COVER



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
17	500	131	130	1930	S15° F24° W38°	TW220.9 ● ● / ##
24,3	700	131	130	2468	2356 2430	
LED	W	mA	ømm	H	Im product/beam3000K	CODE
32	900	131	160	3006	S15° F24° W38°	TW221.9 ● ● / ##
					2885 2955	

● Disponibile anche **HC** Horticulture Available **HC** Horticulture version


16 TONDA ORIENTABILE-COVER CONICA + FOCUS 55
16 ROUND ADJUSTABLE-FOCUS 55 CONICAL COVER



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
12	350	131	130	1285	S15° F27° W46°	TW224.9 ● ● / ##
18	500	131	130	1575	1575 1579	

Accessori - accessories: L55#: lente Ø 55 - lens Ø 55 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.


17 TONDA ORIENTABILE-COVER PIANA + FOCUS 55 ROUND
ADJUSTABLE-FOCUS 55 FLAT COVER



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
12	350	131	131	130	S15° F27° W46°	TW225.9
18	500	164	130	1575	1575 1579	

Accessori - accessories: L55#: lente Ø 55 - lens Ø 55 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

18 TONDA ORIENTABILE-FOCUS 90
ROUND ADJUSTABLE-FOCUS 90



Ø 120 Ø 154						
LED	W	mA	ømm	H	Im product/beam3000K	CODE
17	500	131	130	1930	S15° F24° W38°	TW226.9
24,3	700	131	130	2468	2356 2430	
LED	W	mA	ømm	H	Im product/beam3000K	CODE
32	900	131	130	3006	S15° F24° W38°	TW227.9
					2885 2955	

● Disponibile anche **HC** Horticulture Available **HC** Horticulture version

Accessori - accessories: L85#: lente Ø 85 - lens Ø 85 Gli apparecchi con temperatura colore Tunable White devono essere associati a driver a 2 canali. | The devices with Tunable white color temperature have to be supplied with 2 channel driver.

ACCESSORI / ACCESSORIES

LENTI NYX 55 / LENSES 55				LENTI NYX 85 / LENSES NYX 85				LENTI NYX 115 / LENSES NYX 115			
	ø	Kg	CODE		ø	Kg	CODE		ø	Kg	CODE
	55	0,01	L055S.A / ##		85	0,01	L085S.A / ##		115	0,01	L0115S.A / ##
	55	0,01	L055E.A / ##		85	0,01	L085E.A / ##		115	0,01	L0115E.A / ##
	55	0,01	L055A.A / ##		85	0,01	L085A.A / ##		115	0,01	L0115A.A / ##
	55	0,01	L055R.A / ##		85	0,01	L085R.A / ##		115	0,01	L0115R.A / ##

VERSIONI DISPONIBILI / AVAILABLE VERSION

● KELVIN		○ KELVIN		/ ## FINITURA FINISHING		COMPOSIZIONE CODICE: xxx.x ● ● / ##	
27	2700K	27	2700K		/ 01 bianco white	HOW TO CREATE THE CODE: F1000.827S / 01	
30	3000K	30	3000K		/ 02 nero black	CODE	
35	3500K	35	3500K		/ 49 bronzo bronze	F1000.8	
40	4000K	40	4000K			base code kelvin beam	
TW Tunable White Dali				/ ## FINITURA PREMIUM / PREMIUM FINISHING			
● FASCIO / BEAM				/ 81 oro rosa / rose gold		350 500 700 900 TW	
S Spot				/ 82 bronzo antico antique bronze		DRIVERS VEDI SEE P.452	
F Flood				/ 83 ottone brunito spazzolato brushed burnished brass			
W Wide							

Per i gradi vedere in tabella - For degrees check the table