
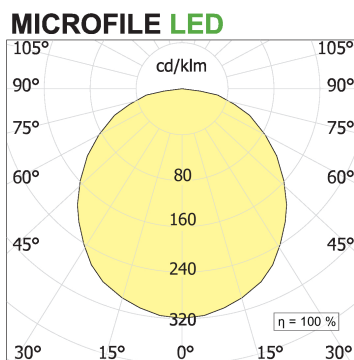


Microfile incasso

codice MF022.827/01



DESCRIZIONE PRODOTTO

Series of fixtures to be ceiling-mounted, recessed or trimless-recessed within flat surfaces or to be trimless-recessed in external and internal angles. Direct diffused lighting emission. Linear LED sources, to be completed with remote 24Vdc driver. Available both as default modules and as modules to be assembled in a system. Body in extruded aluminium, painted finish, complete with opal white polycarbonate diffuser. Light Proof system side-end caps. Degree of protection IP40, IP43 or IP67, according to the area where it is installed.

SPECIFICHE PRODOTTO

Metodo di installazione	Incasso con battuta
Sorgente luminosa	Linea-led
Potenza assorbita	26,4 W
Temperatura colore	2700K
Indice di resa cromatica CRI	>80
Finitura	Bianco
Flusso luminoso apparecchio	2123 lm
Efficienza luminosa	80 lm/W
Alimentatore/trasformatore	Non incluso
Protocollo	Vedi alimentatore
Classe di efficienza energetica D	
Peso	0.61 Kg
Dimensione	L1220 mm
Dimensione forometria	taglio quadrato 24xL+2 mm
Grado IP	IP40
Classe di protezione	Apparecchio in classe III
Spessore cartongesso	min. 9 mm - max. 15 mm

PAGINA WEB



ISTRUZIONI DI MONTAGGIO



