


File/File H sistema - Reglette LED 32W/m

codice R18FH0.940

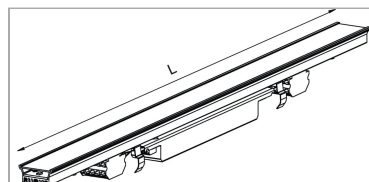

DESCRIZIONE PRODOTTO

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 66x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide (61.5 x 40 mm) and trimless recessed. To be integrated with LED linear light sources, battens for T16 fluorescent lamps, projectors with built-in LED source and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP40 protection rating.

SPECIFICHE PRODOTTO

Metodo di installazione	Sistema
Sorgente luminosa	Linear-led-32w-mt-cri90-en
Potenza assorbita	18 W
Temperatura colore	4000K
Indice di resa cromatica CRI	90
Flusso luminoso apparecchio	2720 lm
Efficienza luminosa	151 lm/W
Alimentatore/trasformatore	Incluso
Protocollo	On/Off
Classe di efficienza energetica	E
Dimensione	L560 mm
Grado IP	IP20
Classe di protezione	Apparecchio in classe I
Tensione	220-240V 50-60Hz

PAGINA WEB



ISTRUZIONI DI MONTAGGIO

