

Elemento luminoso in silicone per Nanofile sistema

codice NN06.827




DESCRIZIONE PRODOTTO

Modular system for diffused outdoor lighting, composed of empty profiles in anodized extruded aluminum available in predefined lengths, trimless recessed version. Side end caps with Light Proof system. To be completed with silicone light element complete with LED linear sources and with 24V power supply to be installed remotely. IP67.

SPECIFICHE PRODOTTO

Metodo di installazione	Sistema
Sorgente luminosa	Led-pro
Potenza assorbita	96 W
Temperatura colore	2700K
Indice di resa cromatica CRI	>90
Flusso luminoso apparecchio	14500 lm
Efficienza luminosa	151 lm/W
Tolleranza colore MacAdam	3
Protocollo	On/Off
Classe di efficienza energetica	D
Dimensione	L10000 mm
Grado IP	IP67

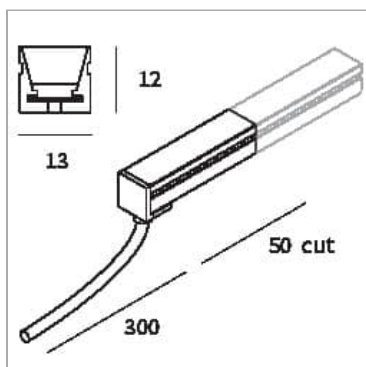

PAGINA WEB



ISTRUZIONI DI MONTAGGIO



