
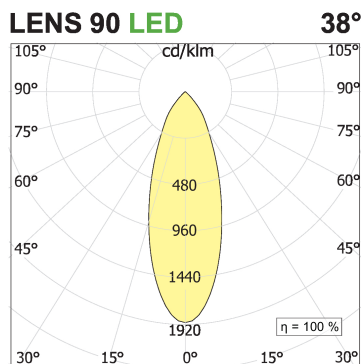


Incas Frame 1

codice IN01.930W/01

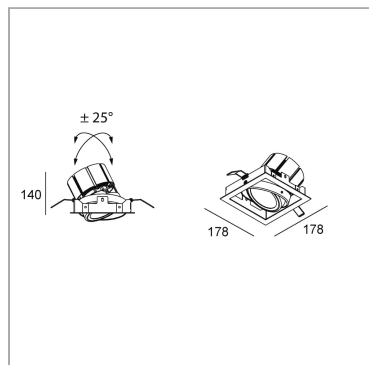

DESCRIZIONE PRODOTTO

Family of adjustable recessed downlight, with COB LED source, with or without frame. Square or rectangular painted steel structure with one or more light sources. Cardanic optical assembly with $\pm 25^\circ$ orientation on the two horizontal axes. The frameless version necessarily requires a subframe for installation on 13mm plasterboard false ceilings. Equipped with high-performance LEDs, with CRI > 90, high-performance passive heatsink in black anodized extruded aluminum and 99.99% pure aluminum metallized reflector. To be associated with remote stabilized current drivers. IP20.

SPECIFICHE PRODOTTO

Metodo di installazione	Incasso con battuta
Potenza assorbita	17 W / 24,3 W
Temperatura colore	3000K
Indice di resa cromatica CRI	>90
Ottica	Wide 38°
Finitura	Bianco
Flusso luminoso apparecchio	1925 lm / 2545 lm
Efficienza luminosa	113 lm/W / 105 lm/W
Tolleranza colore MacAdam	>3 / 3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Alimentatore/trasformatore	Non incluso
Protocollo	Vedi alimentatore
Classe di efficienza energetica	D / E
Dimensione	L178Wx178Hx140 mm
Dimensione forometria	taglio quadrato 162x162 mm
Grado IP	IP20
Classe di protezione	Apparecchio in classe III
Specifiche Prodotto	Basculante/orientabile
Gruppi alimentatori	Corrente LED 700mA

PAGINA WEB



ISTRUZIONI DI MONTAGGIO

