

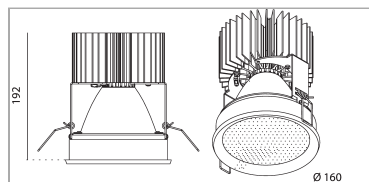


Nyx Diffused 160 Micro per cartongesso

codice NFD00X.940W/01

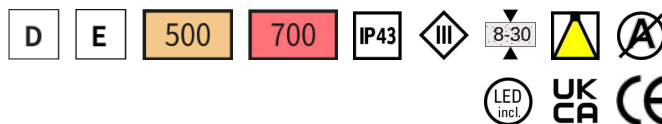

NYX DIFFUS. MICROP.LED

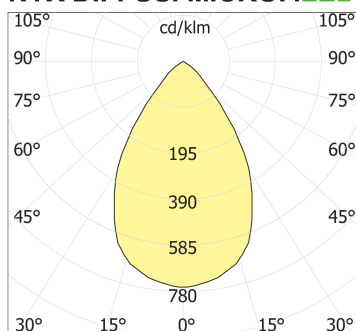

DESCRIZIONE PRODOTTO

Recessed downlight for false-ceiling installation, for diffused lighting. Complete with polycarbonate opal or low luminance microprismatic diffuser. Integrated Chip On Board LED source. Body and optical group in painted aluminum. 99,99% pure aluminum coated reflector. Remote power-supply degree of protection IP43.

SPECIFICHE PRODOTTO

Metodo di installazione	Incasso con battuta
Sorgente luminosa	Led
Potenza assorbita	17 W / 24,3 W
Temperatura colore	4000K
Indice di resa cromatica CRI	>90
Ottica	Wide 65°
Finitura	Bianco
Flusso luminoso apparecchio	1901 lm / 2475 lm
Efficienza luminosa	112 lm/W / 102 lm/W
Tolleranza colore MacAdam	>3 / 3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Alimentatore/trasformatore	Non incluso
Classe di efficienza energetica	D / E
Peso	1.7 Kg
Dimensione	H192 Ø160 mm
Dimensione forometria	taglio tondo 154 mm
Grado IP	IP43
Classe di protezione	Apparecchio in classe III
Specifiche Prodotto	Di forma circolare
Gruppi alimentatori	Corrente LED 700mA
Spessore cartongesso	min. 8 mm - max. 30 mm

PAGINA WEB



ISTRUZIONI DI MONTAGGIO

