


## Quadra 65 soffitto

codice QS11.930F/01

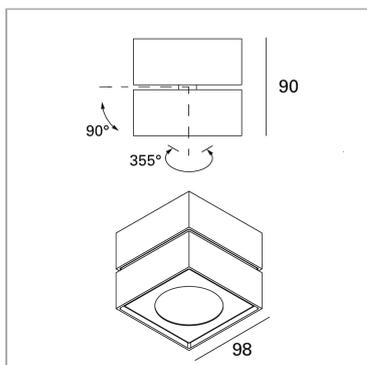

### DESCRIZIONE PRODOTTO

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI > 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR < 19.

### SPECIFICHE PRODOTTO

Metodo di installazione	Soffitto
Sorgente luminosa	Led-en
Potenza assorbita	12 W
Temperatura colore	3000K
Indice di resa cromatica CRI	>90
Ottica	Flood 20°
Finitura	Bianco
Flusso luminoso apparecchio	1411 lm
Efficienza luminosa	118 lm/W
Tolleranza colore MacAdam	2
Durata media stimata	2SDCM 50000h L90 B10 ta 25°C
Alimentatore/trasformatore	Incluso
Protocollo	On/Off
Classe di efficienza energetica	E
Peso	0.90 Kg
Dimensione	L98Wx98Hx90 mm
Grado IP	IP20
Classe di protezione	Apparecchio in classe I
Tensione	220-240V 50-60Hz

### PAGINA WEB



### ISTRUZIONI DI MONTAGGIO

