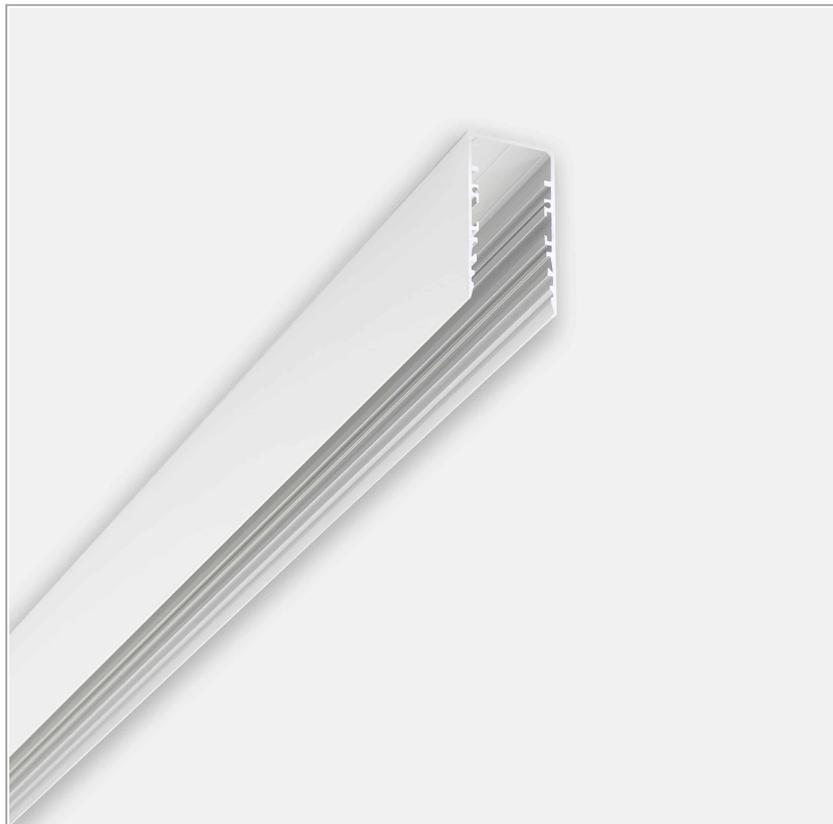


**Minifile Openlight Sistema - Profilo
vuoto sospensione**

codice MO008.2000/01

**DESCRIZIONE PRODOTTO**

Series of semi-recessed, ceiling-mounted or suspended fixtures for direct diffused lighting. For linear LED sources or T16 fluorescent seamless lamps. 230/240V 50/60Hz integrated electronic supply. Available both as default modules and as modules to be assembled in a system. Body in extruded aluminium, painted or anodized finish. Opal white polycarbonate diffuser and Light Proof system side-end caps. Degree of protection IP40 or IP43, according to the way that it is installed.

SPECIFICHE PRODOTTO

Metodo di installazione	Sistema
Finitura	Bianco
Alimentatore/trasformatore	Non incluso
Dimensione	2000 mm

PAGINA WEB**ISTRUZIONI DI
MONTAGGIO**