


Sight Minimal 1M

codice LT4301M.940W/01


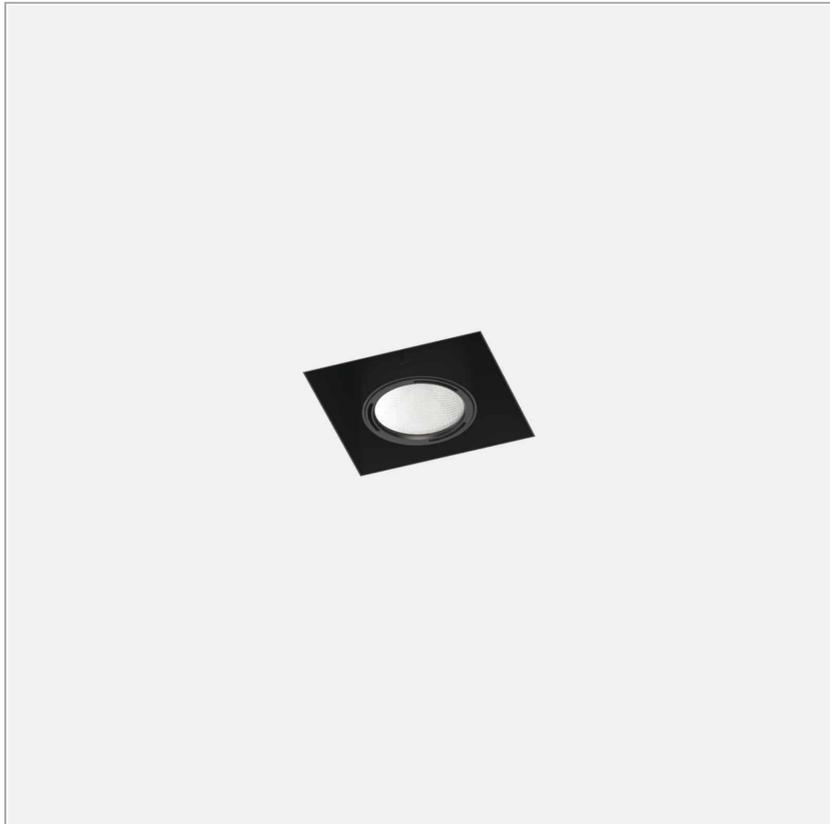


DESCRIZIONE PRODOTTO

Recessed downlight for wall and ceiling installation, IP20/IP23, adjustable, for accent lighting. Available in version with frame or trimless. Body optical group and frame in painted or chromed metal. Optical group adjustable 355° vertically and +/- 40° horizontally. Remote power-supply available as an accessory. Multi-lamp models set up for separate switching. It can also be completed with painted metal box for ceiling and hanging installation. It can also be installed in concrete or brick walls through specific galvanized steel wall-box, available as an accessory.

SPECIFICHE PRODOTTO

Metodo di installazione	Incasso rasato
Sorgente luminosa	Led
Potenza assorbita	17 W / 24,3 W
Temperatura colore	4000K
Indice di resa cromatica CRI	>90
Ottica	Wide 38°
Finitura	Bianco
Flusso luminoso apparecchio	1901 lm / 2475 lm
Efficienza luminosa	112 lm/W / 102 lm/W
Tolleranza colore MacAdam	>3 / 3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Protocollo	On/Off
Classe di efficienza energetica	D / E
Dimensione	L154Wx159Hx177 mm
Grado IP	IP20
Classe di protezione	Apparecchio in classe III
Gruppi alimentatori	Corrente LED 700mA
Spessore cartongesso	13 mm

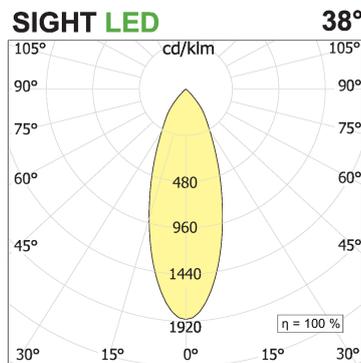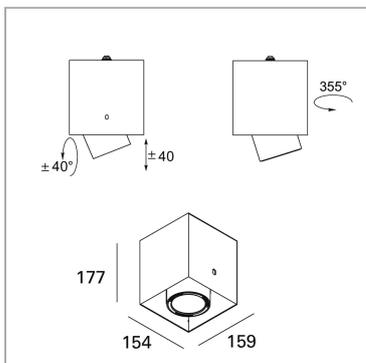

PAGINA WEB




ISTRUZIONI DI MONTAGGIO



ACCESSORI OBBLIGATORI

Telaio per cartongesso 1M



codice TEIN01M

Telaio ispezionabile da stuccare nel cartongesso da mm 15 per l'articolo INCAS 1M, INCAS 1AM senza cornice. Per cartongessi da 13mm, spessorare.

Scheda Tecnica

