
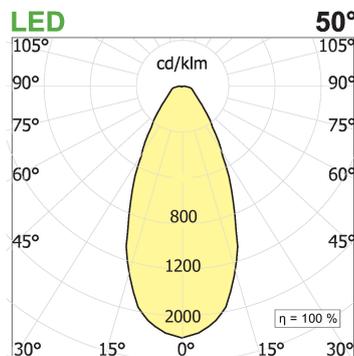
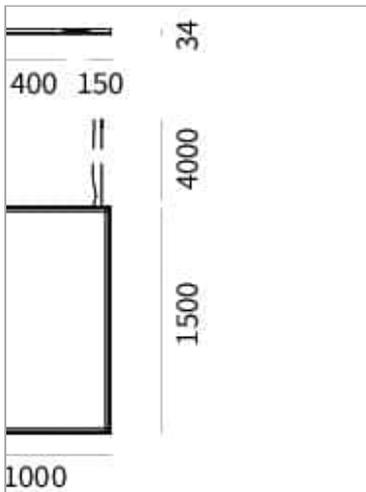
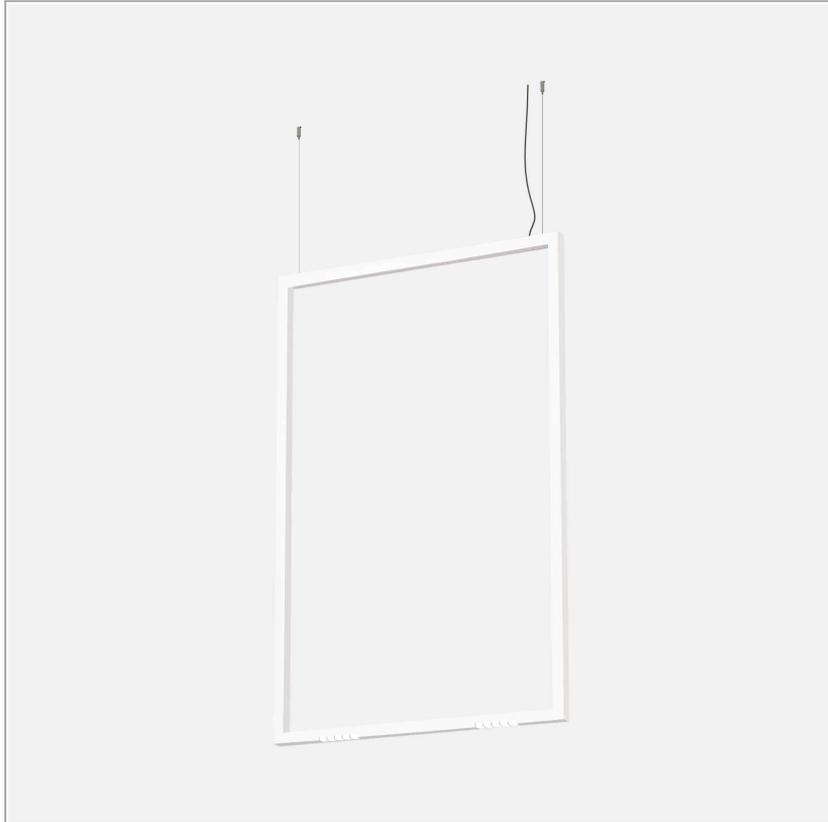


File Flex Square S1015 sospensione

codice FXS02.940W/01



DESCRIZIONE PRODOTTO

Lampada da sospensione indoor di forma rettangolare realizzata in estruso di alluminio 6060, emissione della luce diretta e diffusa, completo di led 22 W, indice di resa cromatica CRI>90. Cavo di alimentazione di sezione tonda trasparente; cavi di sospensione in acciaio con regolatore millimetrico; Verniciatura a polveri epossidiche; Finitura di colore bianco microtexturizzato.

SPECIFICHE PRODOTTO

Metodo di installazione	Sospensione
Sorgente luminosa	Led-en
Potenza assorbita	22 W
Temperatura colore	4000K
Indice di resa cromatica CRI	>90
Ottica	Wide 50°
Finitura	Bianco
Flusso luminoso apparecchio	872 lm
Efficienza luminosa	40 lm/W
Tolleranza colore MacAdam	2
Alimentatore/trasformatore	Non incluso
Classe di efficienza energetica	D
Peso	6.2 Kg
Dimensione	L34Wx1000Hx1500 mm
Grado IP	IP20
Classe di protezione	Apparecchio in classe III
Specifiche Prodotto	Di forma rettangolare
Gruppi alimentatori	Corrente LED 700mA

PAGINA WEB



ISTRUZIONI DI MONTAGGIO



ACCESSORI OPZIONALI

File Flex Rosone con alimentatore max 38W



codice FXS100/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Scheda Tecnica



codice FXS100/02

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Scheda Tecnica

