
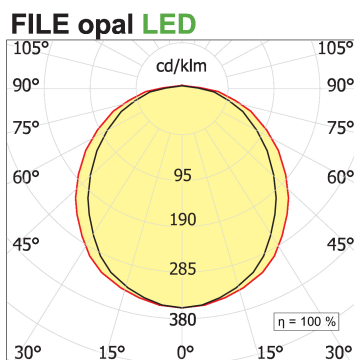


File ceiling

code F1208.827P/01

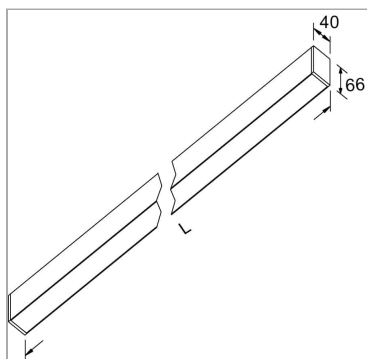

PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with color finish white; Opal polycarbonate diffuser in polycarbonate with diffusing film. Degree of protection IP40/IP43.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	64 W
Color temperature	2700K
Color rendering index CRI	>80
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	3605 lm
Luminous efficiency	56 lm/W
MacAdam color tolerance	3
Durata media stimata	50000h Ta 25° L70B10
Protocol	On/Off
Energy efficiency class	E
Weight	3.3 Kg
Dimension	L2825 mm
IP Grade	IP40
Protection Class	Class I appliance

WEB PAGE



ASSEMBLY INSTRUCTIONS

