
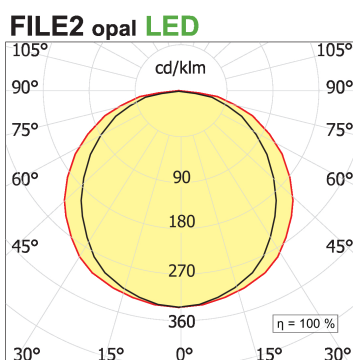


File 2 Ceiling LED A/F

code F2235.940P/01

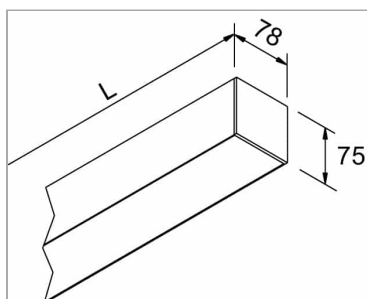

PRODUCT DESCRIPTION

Ceiling luminaire IP40/IP43, direct and diffused light. Body in extruded aluminum 6060, head in die-cast aluminum light proof, led SMD professional 32W/mt color temperature 4000K, assembled on rigid pcb with spray coating treatment for moisture protection, mounted and wired on ARS1 anodized aluminum extruded heatsink with additional transparent palsun protection to prevent contact to the LEDs during installation or maintenance, quick installation tools free by means of Click system with double-click harmonic steel springs for a first clamping to the profile that allows the wiring to the electrical network, to quick coupling without using screws. Integrated electronic power supply.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	linear LED 32W/mt CRI90
Absorbed power	63 W
Color temperature	4000K
Color rendering index CRI	90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	4637 lm
Luminous efficiency	74 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	L1985 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



