
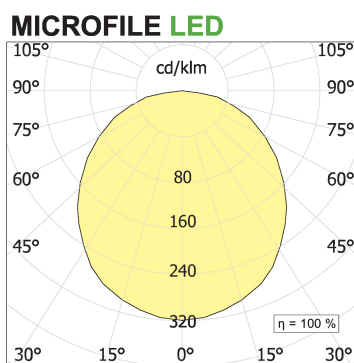


Microfile recessed

code MF023.830/01



PRODUCT DESCRIPTION

Direct light recessed with frame lamp, indoor, made of extruded aluminium 6060 square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules [power] assembled and wired; protocol [protocol]. Epoxy powder coated with [finish] color finish; complete with polycarbonate [diffuser] with diffusing film. Protection degree IP40.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	Linea Led
Absorbed power	33 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1600 lm
Luminous efficiency	48 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	0.80 Kg
Dimension	L1515 mm
Hole size	24xL+2 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



