


## Ceiling Minifile profile with Leva modules

code ML223.940Z/01


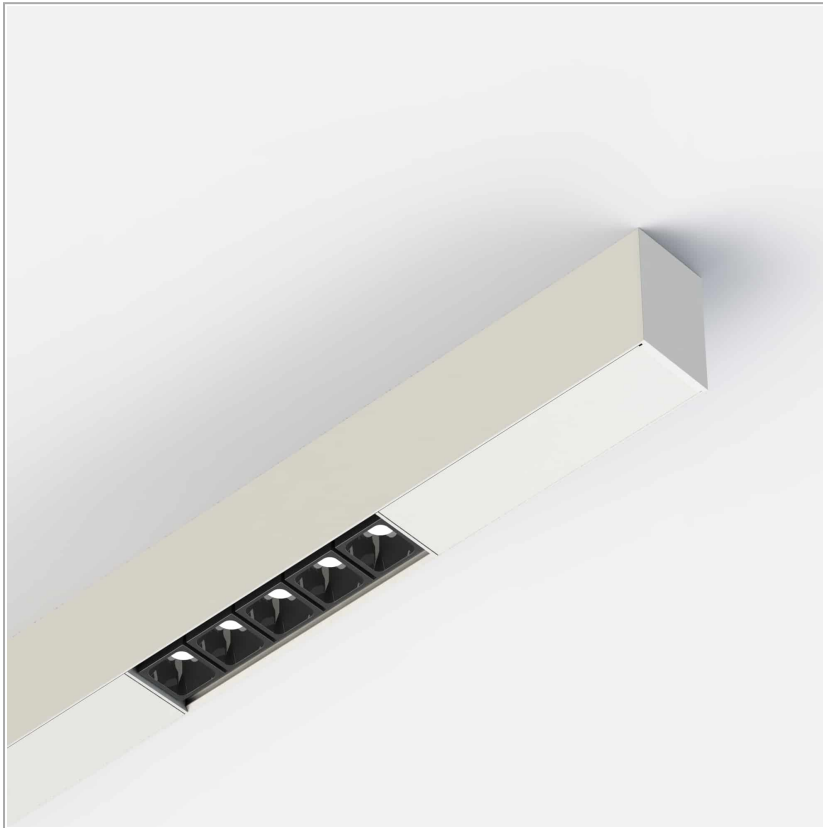


### PRODUCT DESCRIPTION

Linear light module with direct emission. 40x66mm section aluminum extrusion profile. Equipped with 2 LEVA series groups of 5 spots with high color rendering LED sources and mounted on a linear aluminum dissipator; fixed optics with available apertures 20° - 32° - 50° - 41°x18°. The structural composition of the optical system determines a controlled glare emission (UGR 16). Partial blind screens in extruded aluminum arranged for combination with end caps on both sides. Electronic control gear integrated in the luminaire. Optional version with DALI dimming. Type of ceiling installation.

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	10x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White box - black optic
Luminous flux of the product	2220 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	On/Off
Energy efficiency class	E
Weight	2.20 Kg
Dimension	L1420 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

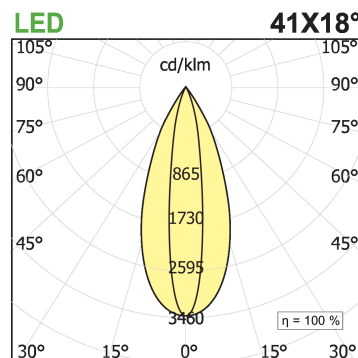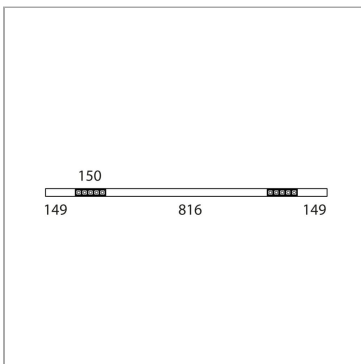

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 1