
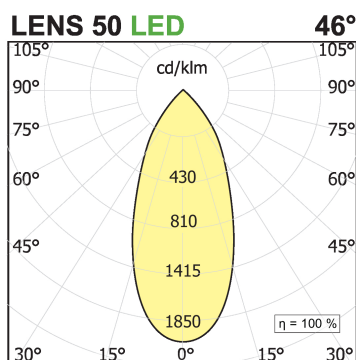


## I-SQUARE FRAME ADJUSTABLE

code IS016.940W/01

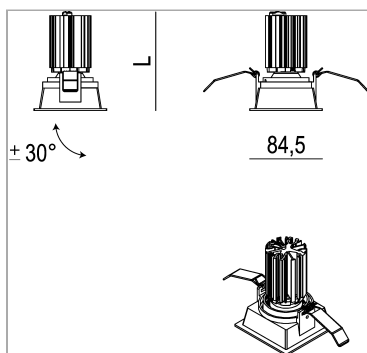

### PRODUCT DESCRIPTION

Recessed direct light lamp with square-shaped indoor stop complete with LED 8 W or 12 W secondary optical color white, color rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; orientation of the automation group of +/- 30, on the horizontal axis; degree of protection IP20/23. Powder coating.

### PRODUCT SPECS

|                              |                                         |
|------------------------------|-----------------------------------------|
| Installation method          | recessed with frame                     |
| Light source                 | LED                                     |
| Absorbed power               | 8 W / 12 W                              |
| Color temperature            | 4000K                                   |
| Color rendering index CRI    | >90                                     |
| Optic                        | Wide 46°                                |
| Finishing                    | White                                   |
| Luminous flux of the product | 1089 lm / 1380 lm                       |
| Luminous efficiency          | 136 lm/W / 115 lm/W                     |
| MacAdam color tolerance      | 2                                       |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25°             |
| Energy efficiency class      | D                                       |
| Weight                       | 0.35 Kg                                 |
| Dimension                    | L84.5x84.5xH95 mm                       |
| Hole size                    | 77X77 mm                                |
| IP Grade                     | Inst. Parete Ip20 / Inst. Soffitto Ip23 |
| Product Spec                 | Adjustable, Square shape                |

### WEB PAGE



## **MANDATORY ACCESSORIES**

### **AE350.16C (Copia)**



code AE350.15C

Electronic power supply current

### **AE500.20C1 (Copia)**



code AE500.20C.MP

Electronic power supply current

