

## Convex recessed frame fisso

code CV018.930W/01





### PRODUCT DESCRIPTION

Recessed direct light lamp with circular stop complete with led 8 W or 12 W, color rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; degree of protection IP20/23. Powder coated.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | recessed with frame         |
| Light source                 | LED                         |
| Absorbed power               | 8 W / 12 W                  |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Wide 46°                    |
| Finishing                    | White                       |
| Luminous flux of the product | 1073 lm / 1285 lm           |
| Luminous efficiency          | 134 lm/W / 107 lm/W         |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Weight                       | 0.35 Kg                     |
| Dimension                    | H90 Ø84 mm                  |
| Hole size                    | Ø 75 mm                     |
| IP Grade                     | IP20                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

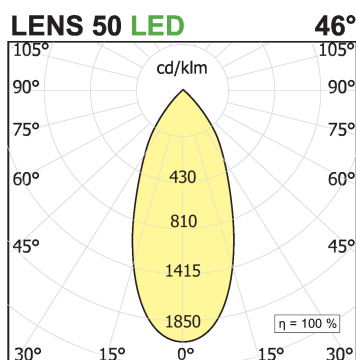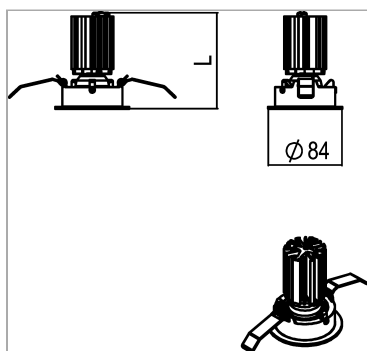

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### **AE350.16C (Copia)**



code AE350.15C

Electronic power supply current

### **AE500.20C1 (Copia)**



code AE500.20C.MP

Electronic power supply current

## OPTIONAL ACCESSORIES

### **Optional accessory to transform Convex in trimless recessed**



code CV030

Accessory to transform Convex into trimless recessed. 100 mm outer diameter

Technical Sheet

