

File H wall double emission

code F1H56.840PD/01





PRODUCT DESCRIPTION

Direct and indirect light indoor wall lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali; polycarbonate with diffusing film. Protection rating IP40.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x51,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	7301 lm
Luminous efficiency	71 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L2265 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

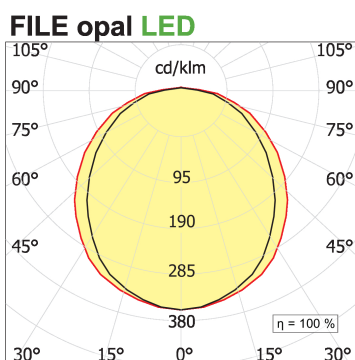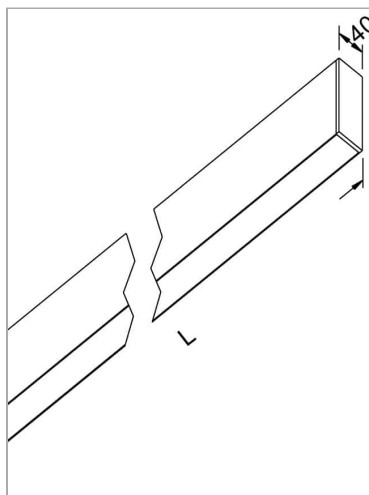

WEB PAGE



ASSEMBLY INSTRUCTIONS

