

Leva Quadra Wall/ceiling Q4 adjutable

















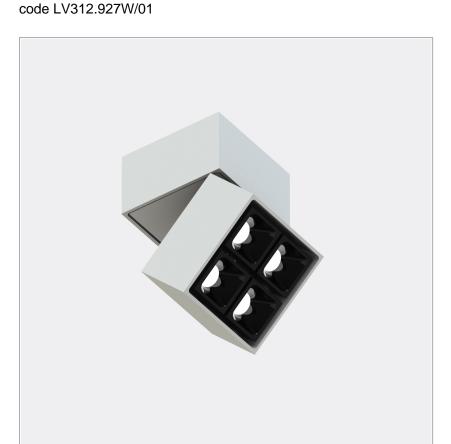

90 90° 355°C' 5



PRODUCT DESCRIPTION

Fix and adjustable projectors family with chip on board LED sources. Mounting options: recessed, with frame or trimless, ceiling and wall-mounted and on 48V tracks, such as the Multi System by Stucchi. Fixture's body in painted extruded aluminum. Optical group complete with CRI>90 chip on board led, lens, antiglare housing and electronic driver (except for recessed versions). The optical group is fixed in the recessed version and adjustable (0-90° on the horizontal axis and 355° on the vertical axis) in the surfacemounted and track versions. Spot, flood and wide optics. UGR<19. Degree of protection IP20/40.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	4x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 50°
Finishing	White box - black optic
Luminous flux of the product	656 lm
Luminous efficiency	75 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	On/Off
Energy efficiency class	E
Weight	0.60 Kg
Dimension	L68xW68xH90 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY

