


Leva 3 trimless recessed - kit

code LV003K.940Z/01

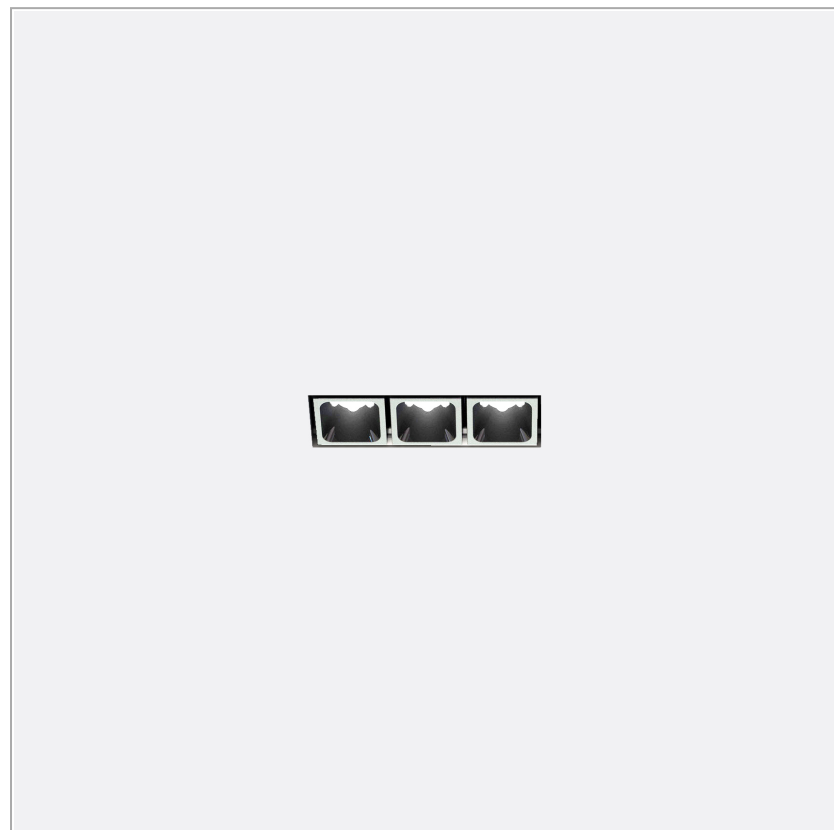

PRODUCT DESCRIPTION

Integrated Chip On Board LED light source fixture. Full concealed, flush-mounted installation. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 41°x18° UGR<16. Protection rating IP20.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	3x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White
Luminous flux of the product	666 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.06 Kg
Dimension	L90xW27xH60 mm
Hole size	32X96 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Rectangular shape
Power supply/Transformer	Not included
Protocol	See power supply



WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Box Leva 3 trimless



code LV003A

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



AE700.11C



code AE700.11C

Electronic power supply current

OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete – Leva3



code CCLV03

Formwork for masonry and concrete, suitable for Leva3. Internal length 97mm - external length 99,4mm

Technical Sheet



