

Twenty 7 fixed round frame 10 - low conical cover

code TW210.940W/01





PRODUCT DESCRIPTION

Recessed projectors with round ceiling frame for integrated LED Chip On Board spot light, low luminance. Recessed ceiling lamp body and painted aluminum optical group. 99.99% pure aluminium metallized reflector. Possibility to mount satin, Fresnel and microprismatic lenses (UGR<19) in polycarbonate. Anti-glare honeycomb grid in painted aluminum. Degree of protection IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	17 W / 24,3 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 41°
Finishing	White
Luminous flux of the product	1993 lm / 2834 lm
Luminous efficiency	117 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Energy efficiency class	D / E
Dimension	H130 Ø131 mm
Hole size	Ø 154 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

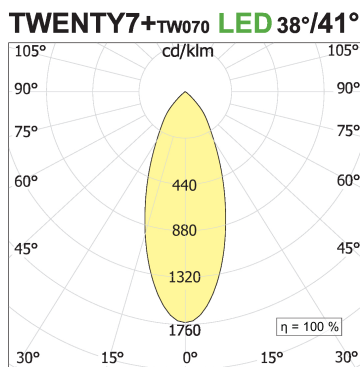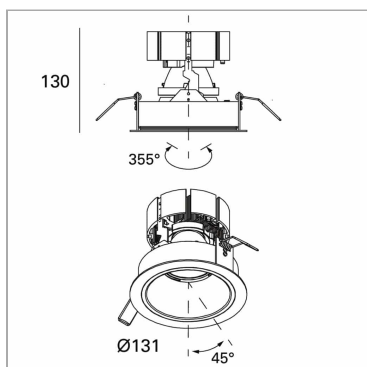

WEB PAGE




ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Lens Ø 105 Asymmetric microprismatic 15° lens Ø 105



code L105A

uncategorized

Technical Sheet



Accessori Lens Ø 105 Ellipsoidal lens Ø 105




code L105E

uncategorized

Technical Sheet



Accessori Lens Ø 105 Honey comb louver Ø 105




code L105R

uncategorized

Technical Sheet



Accessori Lens Ø 105 Satin lens Ø 105



code L105S

uncategorized

Technical Sheet

