

### Leva 10 trimless recessed - kit

code LV010K.940W/01



















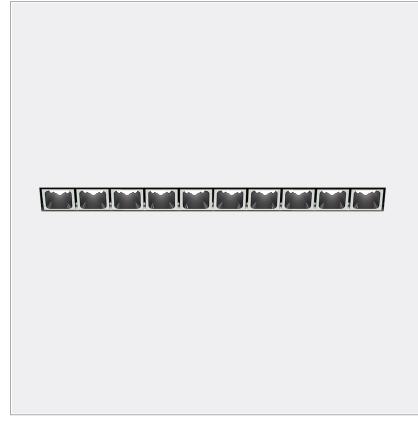

# T T



# PRODUCT DESCRIPTION

Luminaire for integrated LED Chip On Board sources. Flush-mounted installation. Luminaire body in extruded painted aluminium white. Optical units complete with LED chip on board, lens, anti-glare housing. Optics 50° UGR<16. Degree of protection IP20.

## **PRODUCT SPECS**

Installation method	Trimless recessed
Light source	LED
Absorbed power	10x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 50°
Finishing	White
Luminous flux of the product	1694 lm
Luminous efficiency	77 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.20 Kg
Dimension	L300xW27xH60 mm
Hole size	32X306 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Rectangular shape
Power supply/Transformer	Not included
Protocol	See power supply
IP Grade Protection Class Product Spec Power supply/Transformer	IP20 Class III appliance Rectangular shape Not included

**WEB PAGE** 



**ASSEMBLY** INSTRUCTIONS



### **MANDATORY ACCESSORIES**

### **Box Leva 10 trimless**



code LV010A

Trimless recessed uncategorized wallbox for false ceiling



### AE700.32C1.MP



code AE700.32C1.MP

Electronic power supply current

# **OPTIONAL ACCESSORIES**

### Wallbox for brick wall and concrete - Leva10



code CCLV10

Formwork for masonry and concrete, suitable for Leva10. Internal length 307mm - external length 309 4mm

