


File profile ceiling with Leva modules

code F1222.927F/01


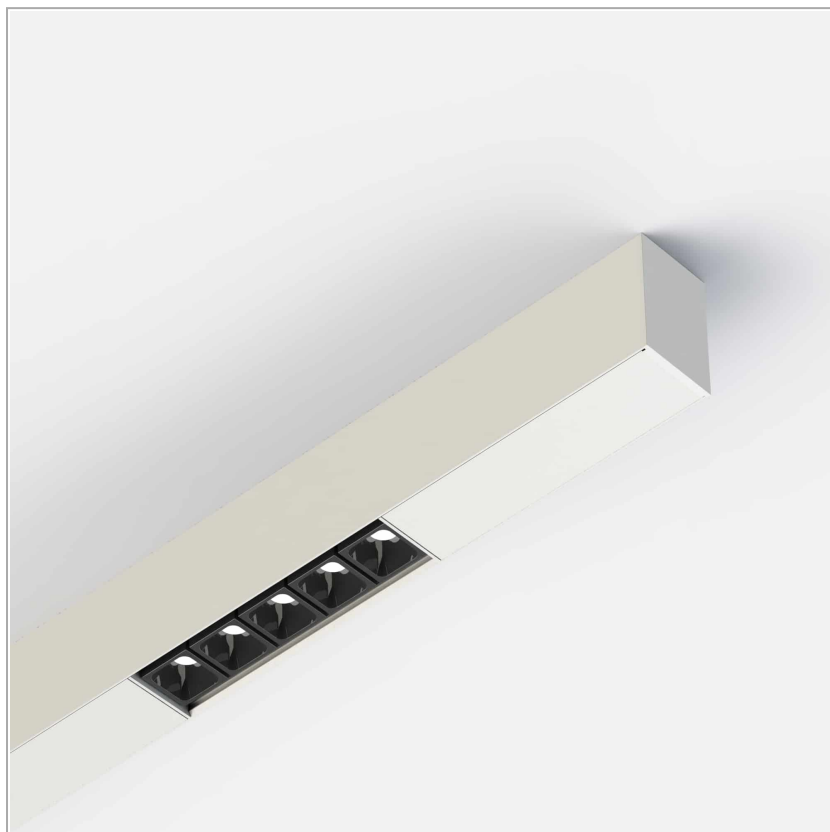


PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Lever 5 spot series with high color rendering LED sources; 22 W temperature 2700K; fixed optics with aperture 32°; protocol On/Off. Lamp with finish: white box - black optic. Degree of protection IP20.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	10x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 32°
Finishing	White box - black optic
Luminous flux of the product	1845 lm
Luminous efficiency	84 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	On/Off
Energy efficiency class	E
Weight	2.40 Kg
Dimension	L1140 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

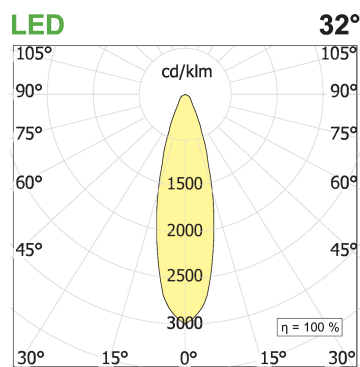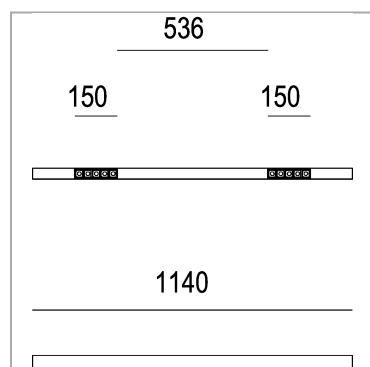

WEB PAGE



ASSEMBLY INSTRUCTIONS

