
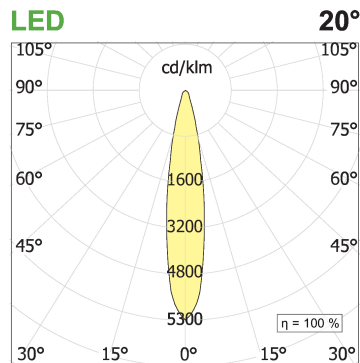
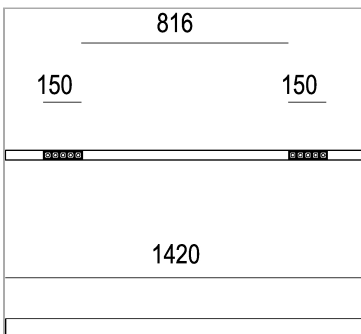


Ceiling File profile with Leva modules

code F1223.940SD/01

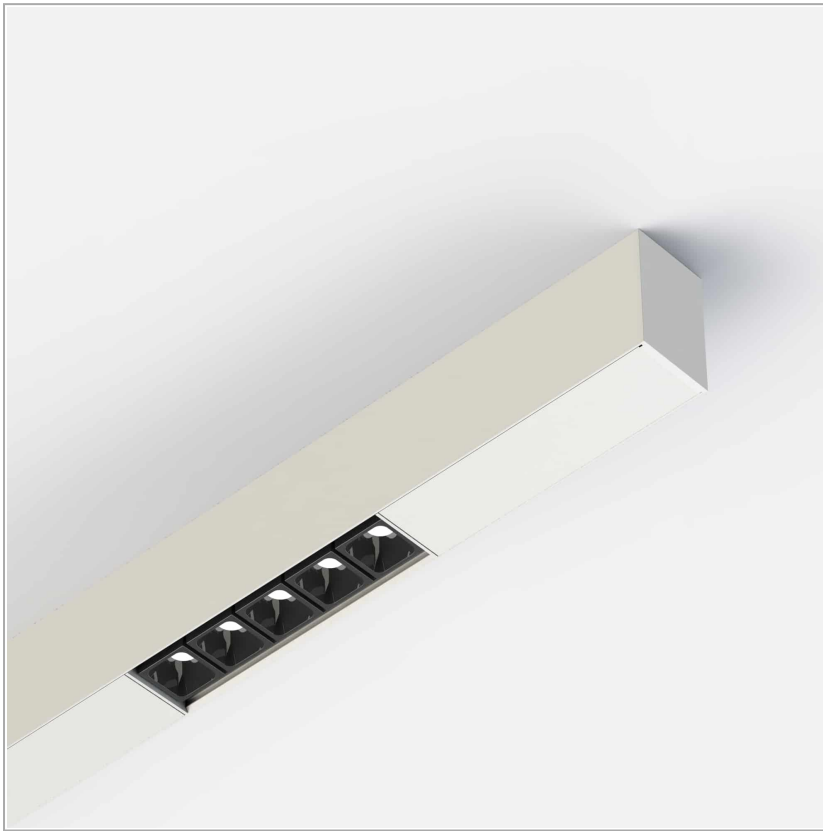

PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Lever 5 spot series with high color rendering LED sources; temperature 4000K; fixed optics with aperture Spot 20°; protocol Dimmable Dali. Lamp with finish: white box - black optic. Degree of protection IP20.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	10x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 20°
Finishing	White box - black optic
Luminous flux of the product	2220 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	2
Durata media stimata	50000h Ta 25° L90B10
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	3.00 Kg
Dimension	L1420 mm
IP Grade	IP20

WEB PAGE



ASSEMBLY INSTRUCTIONS

