
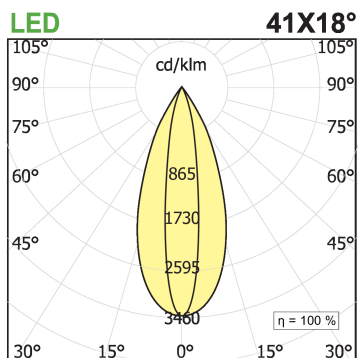
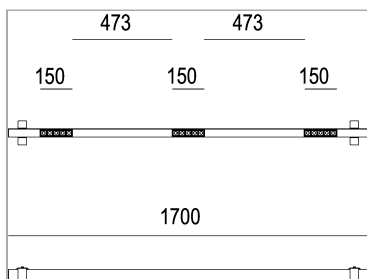


File suspension with Leva group direct or direct/indirect light

code F1344.930Z/01



PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 3 groups Lever 5 spot series with high color rendering LED sources; 33 W temperature 3000K; fixed optics with aperture ; protocol On/Off. Lamp with finish: white box - black optic. Degree of protection IP20.

PRODUCT SPECS

| | |
|------------------------------|---|
| Installation method | Suspension |
| Light source | LED |
| Absorbed power | 15x2,2 W / 22 W |
| Color temperature | 3000K |
| Color rendering index CRI | >90 |
| Optic | Asymmetric |
| Finishing | White box - black optic |
| Luminous flux of the product | 2625 lm / 1750 lm |
| Luminous efficiency | 80 lm/W |
| MacAdam color tolerance | 2 |
| Life time estimate | 50000h Ta 25° L90B10 / 3SDCM 50000h L90 B10 Ta 25°C |
| Protocol | On/Off |
| Energy efficiency class | E / D |
| Weight | 3.70 Kg |
| Dimension | L1700 mm |
| IP Grade | IP20 |
| Power supply | 220-240V 50-60Hz |

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 1