

Celing File H profile with Leva modules

code F1H23.940F/01





PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Lever 5 spot series with high color rendering LED sources; temperature 4000K; fixed optics with aperture ; protocol On/Off. Lamp with finish: white box - black optic. Degree of protection IP20.

PRODUCT SPECS

| | |
|------------------------------|---------------------------------|
| Installation method | Ceiling surface mounted |
| Light source | LED |
| Absorbed power | 22 W |
| Color temperature | 4000K |
| Color rendering index CRI | >90 |
| Optic | Flood |
| Finishing | White box - black optic |
| Luminous flux of the product | 2220 lm |
| Luminous efficiency | 101 lm/W |
| MacAdam color tolerance | 2 |
| Life time estimate | 3SDCM 50000h L90 B10 Ta 25°C |
| Protocol | On/Off |
| Energy efficiency class | D |
| Weight | 3.00 Kg |
| Dimension | L1420 mm |

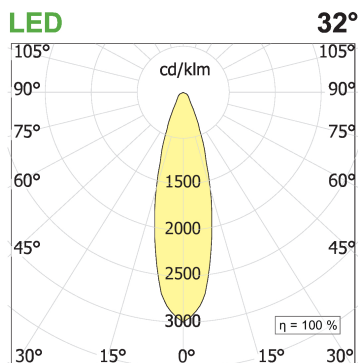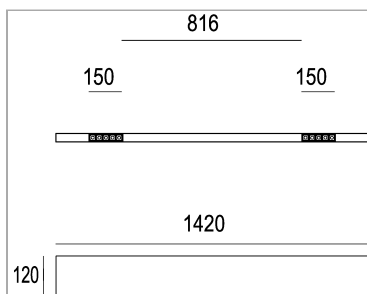

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 1