


Microfile H Exagonal Ceiling

code MFH231.827/01


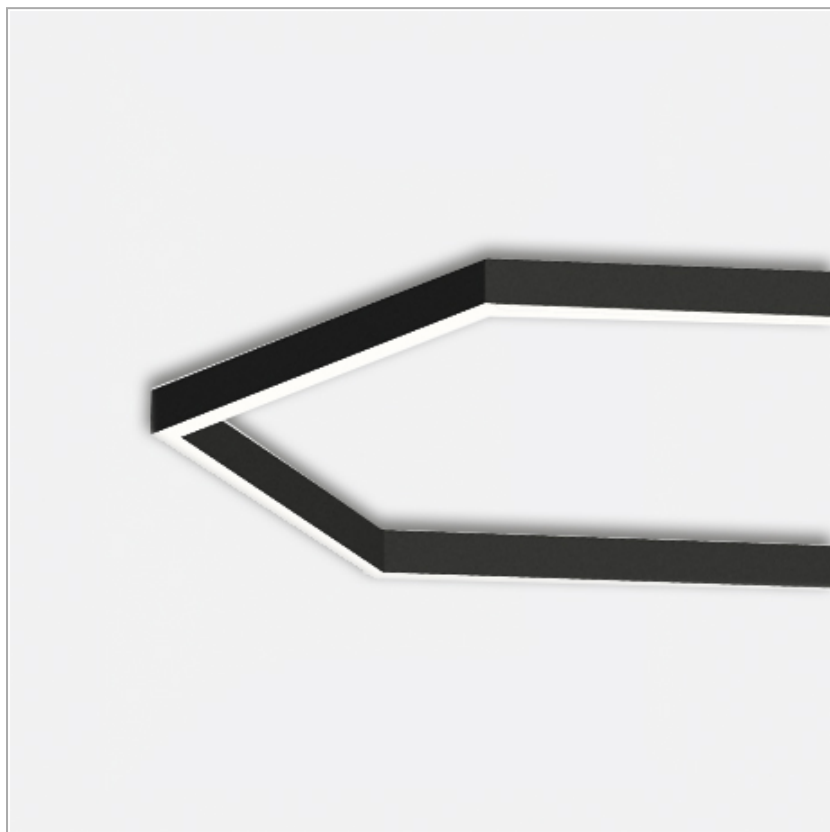


PRODUCT DESCRIPTION

Lighting body composed of extruded aluminium profile section 20x34,5mm hexagonal shape 802x695mm, ceiling installation for direct diffused lighting, complete with silicone screen, epoxy powder coated version white. Linear LED source 45 WW to be completed with 24vdc remote power supply. Degree of protection IP44.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Linea Led
Absorbed power	45 W
Color temperature	2700K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	2396 lm
Luminous efficiency	53 lm/W
Energy efficiency class	D
Weight	1.5 Kg
Dimension	L695xW802 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Exagonal shape
Power supply/Transformer	Not included
Protocol	See power supply

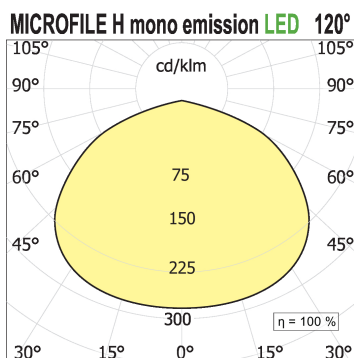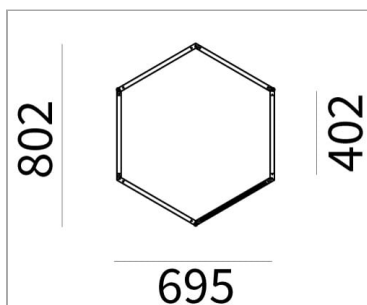

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet



Accessori Joints for Microfile H exagonal

code MFH080

uncategorized

Technical Sheet



code MFH081

uncategorized

Technical Sheet

